


OVERVIEW

The DRYMOD is used to convert the 12VDC 500mA lockpower output on Hartmann Controls PROTECTOR.Net door controllers to a dry contact mechanical relay. Suitable for magnetic locks or situations where mechanical relays are a better fit. This module is compact and convenient.

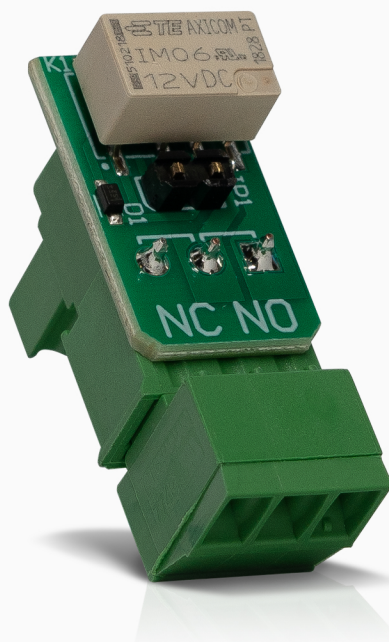

SPECIFICATIONS

PCB Dimensions

0.826" x 0.433"

INPUT

12VDC

OUTPUTS

Dry contact mechanical relay

Max Voltage: 30 VDC/VAC **Max Current:** 1.5A NC and NO supported.

Wire Spec 152m (500') Max Distance, 2 conductors stranded 18 AWG.

CERTIFICATIONS

UL 294/ULC S319-05 listed, FCC.



HARTMANN
ACCESS CONTROL SYSTEMS

DRYMOD

Module to Convert a 12VDC Output to NO/C/NC
NO/C/NC Mechanical Relay Rated 30VDC 1.5A

SPECIFICATIONS

COMPATIBILITY


Meant for use with any of the following part numbers:

POE-ODM-XB POE-ODM-XW POE-ODM-MB POE-ODM-MW PRS-2DR-Starter PRS-TDM

WARRANTY

3 year warranty

Example Diagram DRYMOD with PoE door controller

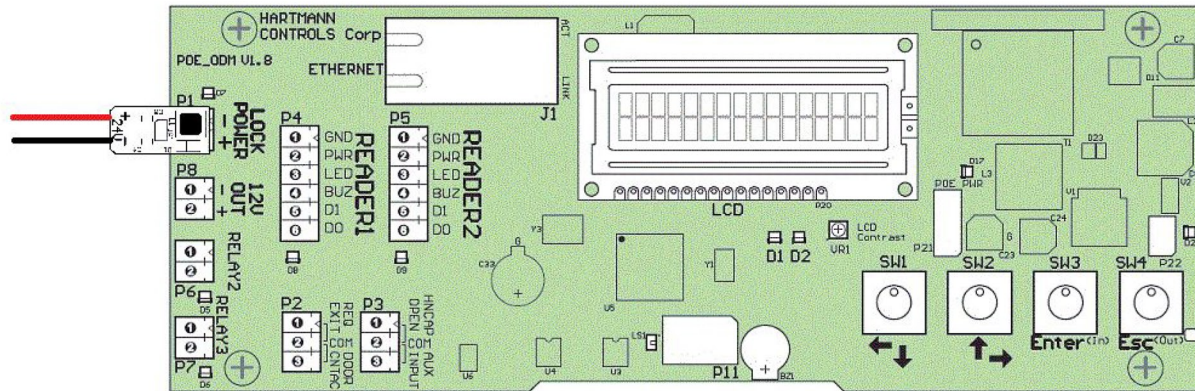

Example Diagram DRYMOD with PRS-TDM

