




1595

100-240VAC / 33VDC POWER SUPPLY UNIT

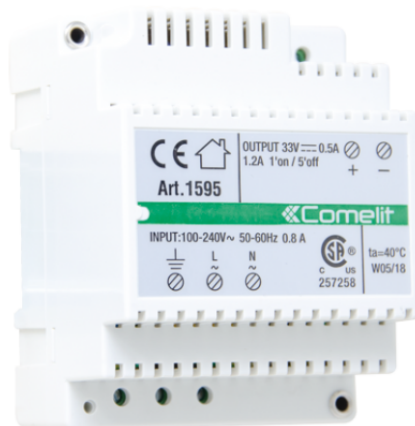

Power supply unit with input of 100÷240VAC/50÷60Hz, 33VDC output with 500mA continuous and 1.2A inrush current for video door entry panel. Equipped with internal protection against overcurrent and short circuits. Dimensions: 71.7x90x62 mm (4 DIN modules).



1595

100-240VAC / 33VDC POWER SUPPLY UNIT

MAIN FEATURES

Supply voltage	100÷240
Output supply voltage	33VDC
Max. current delivered (A)	0.5
Maximum inrush current (A)	1.2
Input connector	Terminal block
Applicable to DIN rail	Yes
Number of DIN modules (n°)	4

HARDWARE SPECIFICATIONS

Product weight (oz) (oz)	7.76
--------------------------	------

GENERAL DATA

Height (inch) (in)	2.44
Width (inch) (in)	2.83
Depth (inch) (in)	3.54
Type of finishing materials	Plastic
Product color	White RAL9010
Operating temperature (°F)	41 ÷ 104
Operating humidity (RH max) (%)	25 ÷ 95

COMPATIBILITY

Simplebus 2 audio/video system	Yes
Simplebus 2 audio system	Yes
Simplebus 1 audio system	Yes
Vip system	Yes
Kit audio/video system	Yes

ELECTRICAL SPECIFICATIONS

Maximum power delivered (W)	14
-----------------------------	----



1595

100-240VAC / 33VDC POWER SUPPLY UNIT

ACCESSORIES



ACMRP CONTROL PANEL W/1 PORT, VIGIK PLUS