


D-2000AD1

MIC/LINE INPUT MODULE

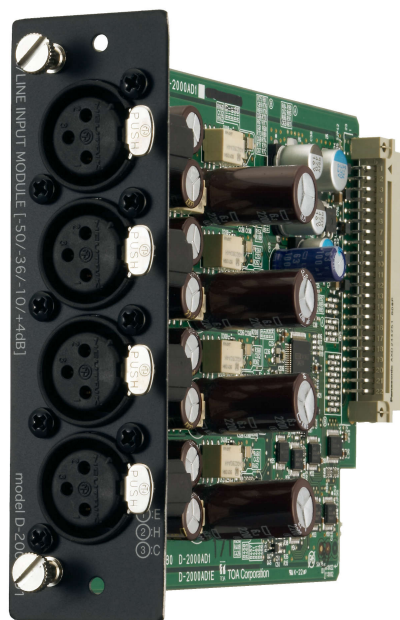

The D-2000AD1 is a 4-channel Microphone/Line Input Module designed for use with the D-2008SP Digital Mixing Processor Unit. It employs XLR type connectors.

Key features


- 4-channel, XLR connectors
- A/D converter: 24 bit
- Phantom power supply (48 V)
- Distortion: 0.008 % or less

Specifications

*0 dB = 0.775 V

Input	4 channels, Mic/Line selectable Mic: -50/-36 dB*, 2.6 k Ω , electronically-balanced Line: -10 dB*, 2.6 k Ω /+4 dB*, 7 k Ω , electronically-balanced Connector: XLR-3-31 equivalent Phantom power supply (48 V DC, can be used when set for the Mic) Ground lift switch
A/D Converter	24 bit
Sampling Frequency	48 kHz
Frequency Response	20 Hz - 20 kHz, ± 1 dB (+4 dB* input)
Dynamic Range	104 dB (IHF-A weighted) or more (+4 dB* input)
Total Harmonic Distortion	0.008 % or less (+4 dB* input)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) x 119.5 (H) x 178.4 (D) mm (1.38" x 4.7" x 7.02")
Weight	200 g (0.44 lb)


Dimensions

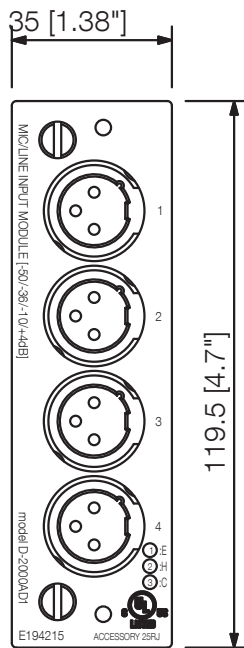

Front View



Top View

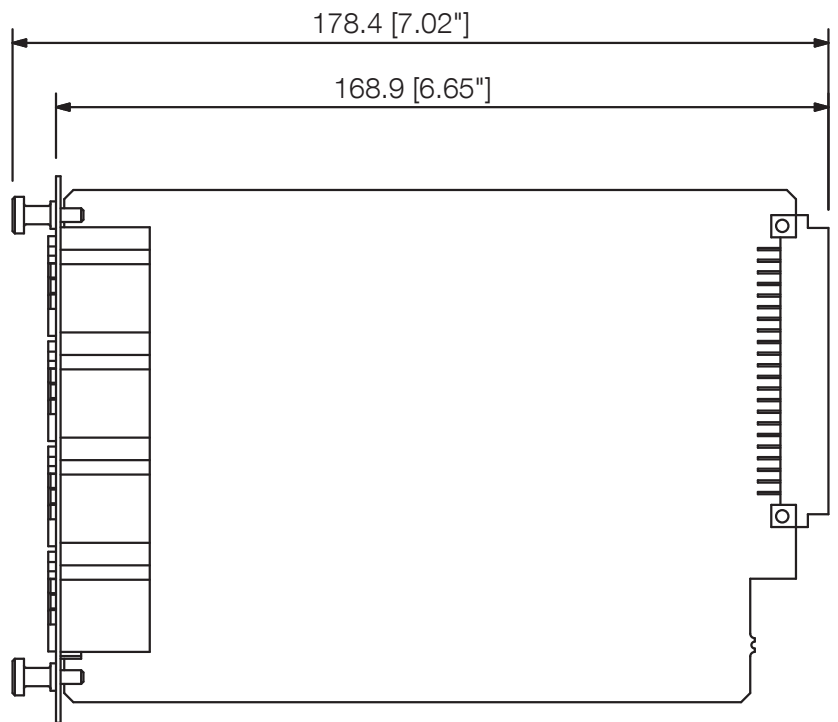

Side View

UNIT:mm

SCALE:1/2

A&E specifications

Input module with four balanced audio inputs. 3-pole XLR jacks for signal input. Sensitivity and phantom power by PC software switchable, ground-lift switch on the module.