


**6721W****SIMPLEBUS2 MINI HANDSFREE DOOR ENTRY MONITOR**

Wall-mounted hands-free monitor with full-duplex audio and 4.3" / 16:9 colour screen. Allows brightness control, plus adjustment of the ringtone volume, which can be customised by choosing one of several different melodies. Equipped as standard with 5 sensitive touch back-lit controls for audio activation, door-opening, self-ignition, switchboard call, privacy service and LED signalling for the door status. Manages floor door calls as standard. Option of adding 3 additional buttons with accessory Art. 6734W. Complete with 2 x 8-position DIP-SWITCH for user code programming and button programming. The wall-mounting or residential series box backplate and riser distribution terminal Art. 1214/2C are included. The monitor can only be used in 2-wire Simplebus2 systems. Dimensions: 115x160x22mm.

**AWARDS**DESIGN  
MILANO

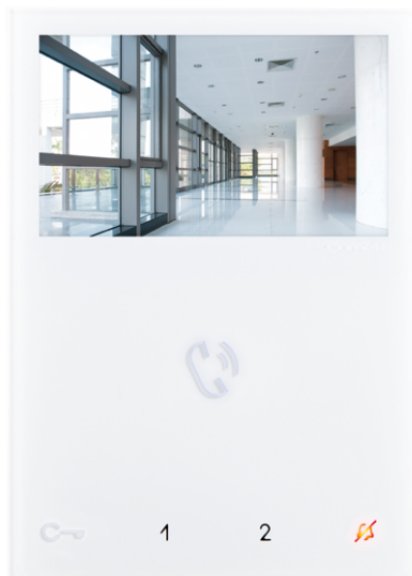

**6721W**

## SIMPLEBUS2 MINI HANDSFREE DOOR ENTRY MONITOR

### GENERAL DATA

Height (inch) (in)	6.3
Width (inch) (in)	4.53
Depth (inch) (in)	0.87
Product weight (oz) (oz)	17.64
Product color	White RAL9003
Type of finishing materials	ABS
Wall-mounted	Yes
Desk base-mounted	Yes, with a dedicated accessory

### COMPATIBLE SYSTEMS

Audio/video Simplebus 2 with power supply art. 4888CU	Yes
Audio/video Simplebus 2 with power supply art. 1210/1210A	Yes
Simplebus 2 audio/video kit with power supply art. 1209	Yes

### DISPLAY

Display size (")	4.3
Aspect Ratio	16:9
Resolution (pixels)	480x272

### AUDIO FEATURES

Microphone	6mm (Ø), Omnidirectional
Loudspeaker	36mm (Ø), 40 Ohm, 1W
Technologies implemented	Full-Duplex

### ELECTRICAL CHARACTERISTICS

Type of power supply	Power supply from video door entry bus
Supply voltage	22÷34 VDC (Bus)
Absorption in stand-by (W)	0.06



**6721W**

## SIMPLEBUS2 MINI HANDSFREE DOOR ENTRY MONITOR

### ELECTRICAL CHARACTERISTICS

Maximum absorption (W)	11.9
------------------------	------

### HARDWARE FEATURES

Type of buttons	Capacitive
Service buttons	Lock-release, Answer, Silent (Privacy), Door open
No. of programmable buttons for additional functions	2 (5 with accessory art. 6734W)
Clamps	L L CFP1 CFP2
Removable terminals	Yes

### SETTINGS

Loudspeaker volume	Yes
Microphone volume	Yes
Ringtone volume	Yes
Screen brightness control	Yes
Screen contrast	Yes
Screen colour	Yes

### ENVIRONMENTAL AND COMPLIANCE FEATURES

IP protection rating	IP30
Operating temperature (°F)	41 ÷ 104
Operating humidity (RH max) (%)	25 ÷ 75
Environmental class	I (B1)
Certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)

### GENERAL FEATURES

Door opener	Yes
Automatic door opening on call (Doctor)	Yes
Silent mode (Privacy)	Yes



**6721W**

## SIMPLEBUS2 MINI HANDSFREE DOOR ENTRY MONITOR

### GENERAL FEATURES

Self Activation	Yes
CPS call	Yes
Intercom calls	Yes
Outside door call input	Yes
Customisable ringtone	Yes
Automatic answer (handsfree)	Yes
Sending alarm calls	Yes
Actuator control	Yes
Multiple address	Yes
Door open signaling	Yes

**6721W****SIMPLEBUS2 MINI HANDSFREE DOOR ENTRY MONITOR****ACCESSORIES****6711WV ADAPTER PLATE FOR MINI HANDSFREE**

Adapter plate to finish the installation of the Mini Handsfree monitor in case of replacement of flush-mounted or wall-mounted Planux, Smart and Icona monitors. White color. Dimensions: 170x220x3 mm.

**6732A DESK BASE FOR HANDS-FREE MINI MONITOR. S2**

Desk base installation accessory for hands-free Mini monitor in Simplebus 2 system.

**6720 Access. cables external passage for MINI HF. S2**

Wall support bracket for handsfree Mini monitor allowing thru-routing of external cables.

**6734W ADD. BUTTONS KIT HANDS-FREE MINI MONITOR, WHITE**

Accessory for conversion of the monitors of the Mini series Art 6721W and 6721W/BM into 8-button versions. Includes an 8-button faceplate and an electronic module for button activation, which can be installed quickly without the need to open the monitor casing.