

INTELLIGENT CONTROLLER

IRC-2000



IRC-2000

Intelligent Reader Controller

New features:

- Increased cardholder capacity
- Increased event buffer size
- In/Out reader modules
- Updated & improved design


Great features:

- Distributed architecture
- Built in clock and calendar
- Flash firmware updates
- Optimal capacity:
 - 2 Access Points (Doors)
 - 8 Programmable Inputs
 - 8 Programmable Outputs
- Built-in RS-232/485 converter
- Thermal circuit protection
- **LOW COST!**

The IRC-2000 Intelligent Controller allows control of two access control points (doors). It utilizes flash firmware for easy upgrades, and employs fully distributed intelligence for off-line operations. Decisions such as access level changes, schedule activation and card expiration are made by the IRC-2000 controller without the need of a computer.

The panel contains on-board clock and memory backup as well as thermal overload protection. IRC-2000 supports fully supervised communication via RS-232, RS-485 and TCP/IP with selectable communication speed up to 56.6Kbps.

Connect to the Integra32 Server PC via I directly via RS-232 cable, LIF-100 TCP/IP Gateway or a RS232/485 convertor, for a total of up to 16 panels per controller network.

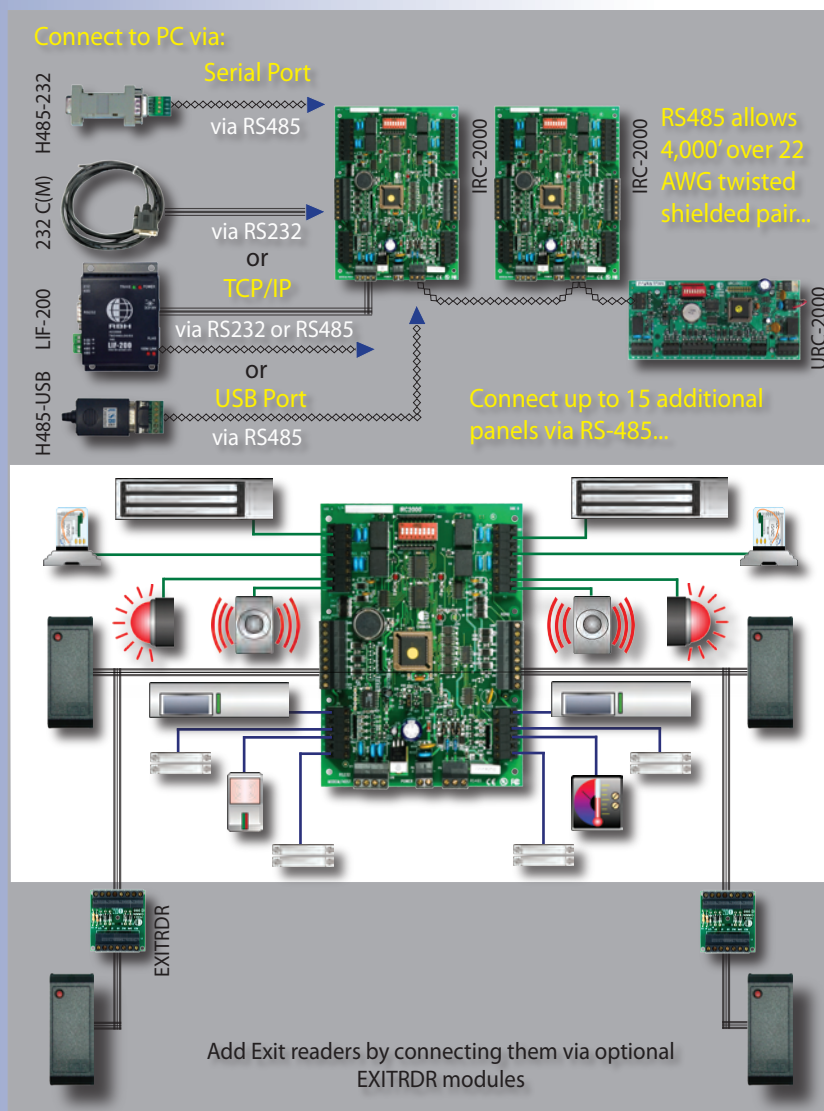


Designed to work with



Integra 32™

IRC-2000

Specifications

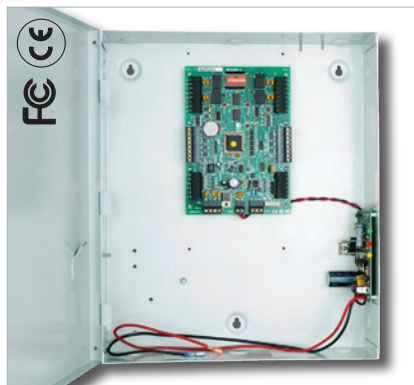

IRC-2000 Includes controller, ENCL1 enclosure and PS1224 power supply.



IRC-2000-UL Includes controller, ENCL1 enclosure, temper switch and PS1224 power supply.

Panels per Network :	16
Local PC & Remote Communications :	RS232, TCP/IP Ethernet or RS485, supervised
Communication Between Controllers :	Supervised RS-485
Speed :	Programmable 9.6 - 56 Kbps
Distance :	4,000ft (1,200m)
Cable Type :	18AWG, 2 conductor, twisted, shielded
Cards per Panel :	5,000 (up to ten digit card numbers) 8,0000 optional
Access Levels per Panel :	5,000 (one per card per panel) 8,0000 optional
Site Codes per Panel :	10 (site code programming is not mandatory)
Off line Transactions Buffer :	3,000 FIFO, command, and alarm priority
Access Points (Readers/Keypads) :	2 (Red, Green LED and Buzzer control)
Distance :	Max 500ft (150m)
Cable Type :	20 - 22 AWG, 6 or 8 conductor, shielded
Simultaneous Card Formats per Panel :	5, Wiegand or Clock & Data
Programmable Supervised Inputs :	8, four state monitoring, NO and NC inputs
Input Supervision :	4 state monitoring (1 or 2 resistors)
Distance :	Max 1,000ft (300m)
Cable Type :	20 - 22 AWG, 2 conductor
Programmable Outputs :	4 SPDT 2A @ 30VDC, dry contacts
Output mode :	4 Electronic drivers, 12VDC max, 100mA
Power Requirements :	16.5VAC, 40VA transformer (not included)
Recommended Back-up Battery :	12V, 7AH lead acid or gel cell (not included)


Available Models to Order:

IRC-2000
IRC-2000-UL
IRC-2000-B board only

Compatible Accessories



RBH-RS232-C (M)
Serial Cable




RBH-H485-232
RS232/485 Adaptor



RBH-H485-USB
USB/RS485 Adaptor



RBH-LIF-200
LAN Adaptor



RBH-EXITRDR
Exit Reader Module



Americas

RBH Access Technologies, Inc.
2 Automatic Drive, Suite 108
Brampton, ON Canada
L6S 6K8

Tel. +1-905-790-1515
Fax. +1-905-790-3680
info@rbh-access.com
www.rbh-access.com

Europe

ARAS & RBH Security Group Ltd.
F3 Enterprise Way, Vale Business Park
Evesham, Worcestershire UK
WR11 6GS

Tel. +44(0)-1386-425810
Fax. +44(0)-1386-425810
info@aras-rbh.com
www.aras-rbh.com