
DATA SHEET

REF. 1438 WAY-FI OUTDOOR PANEL



Description

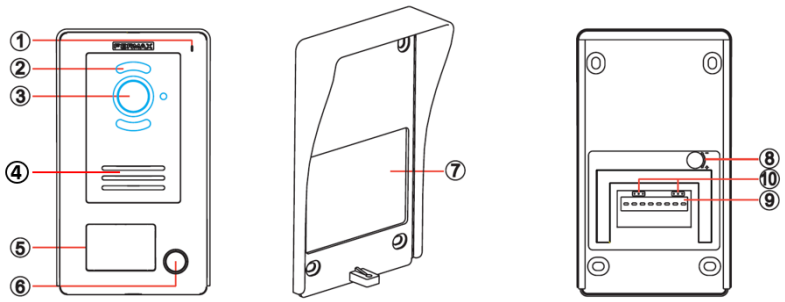

1. Microphone
2. LEDs for night vision (3 on top and 3 bottom).
3. Wide angle camera (H=120º; V=72º).
4. Speaker.
5. Nameplate removable from the front.
6. Call button.
7. Rain cover.
8. Speaker volume adjust.
9. Connector.
10. Jumper I (J1) for relay activation mode (NO/NC); Jumper D (J2) panel selection.

Specifications

OUTDOOR PANEL	1438
Dimensions (Height x Width x Depth)	162 x 94 x 34 mm (with rainhood)
Installation	Surface. Rain hood included and necessary for surface mounting
IP / IK rating	IP 44 / IK 07
Finish	Aluminium
Electric lock activation	Yes (output 12 Vdc 250 mA, connections S+, S-). Activation time (1-8 s.)
Dry contact relay for 2nd door activation (garage)	Yes. Configurable as Normally Open/Close. Activation time (1-8 s.)
Exit button	Yes. Electric lock (S+, S-) is activated while pressing. Connections PL, S+
Camera	CMOS, resolution 900 TVL. Wide angle (H=120º; V=72º). White LEDs (6) for camera illumination by light sensor automatic activation.
Set Cardholder + Pushbutton	Cardholder removable from the front and pushbutton both backlighted by blue leds. Backlight automatic activation by light sensor.
Secondary entry panel	Yes (1 additional panel)
Possibility of additional analogue cameras	Yes (1 additional camera in each panel)
Loudspeaker volume adjustment	Yes
Operating temperature	[-20ºC, +55ºC]
Maximum current of the electric lock	250 mA holding current