


IQ DOOR/WINDOW S-LINE QUICK INSTALL GUIDE



STEP
1

CHOOSE
INSTALLATION
LOCATION

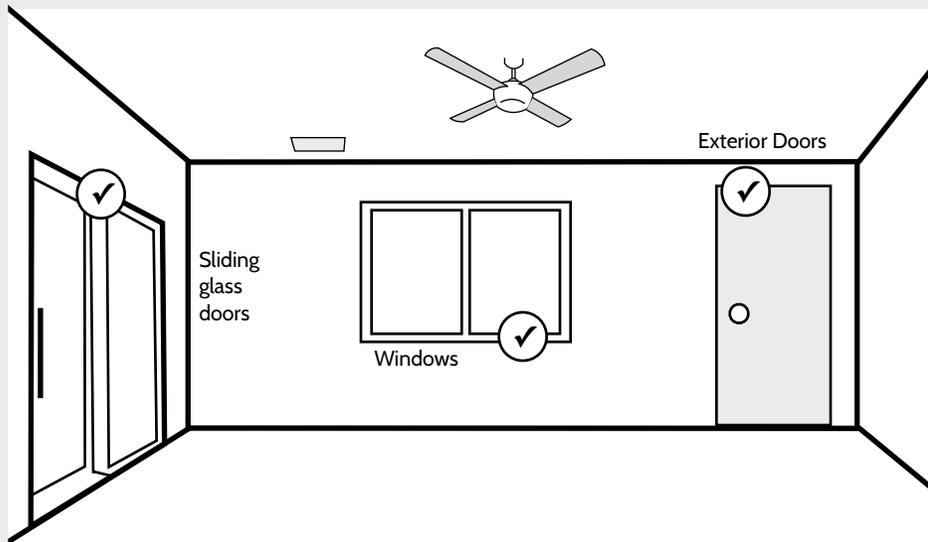

SEE REVERSE FOR REMAINING STEPS

SPECIFICATIONS

Sensor: 2.6" H x .75" W x .75" D

Code outputs: tamper, tamper restore, alarm, alarm restore, low battery.

Transmitter frequency: SECURE 319.5 MHz (S-Line)

Unique code ID

Supervisory keep-alive interval: 70 minutes.

RF Peak field strength: typical 36000 uV/m at 3m

Operating Temperature: -10C-50C

Relative Humidity: 5-95% Non-Condensing

Storage Temperature: -40-80C

Replace battery with exact replacement every 7 years with 3V CR2 (x1).

Note: Battery Safety


Observe polarity when inserting replacement batteries to avoid damaging the sensor.

Risk of fire, burns and explosion. Do not recharge, disassemble, burn or expose batteries to temperatures above 100C (212F).


Dispose of used batteries properly and in accordance with all local laws. Keep batteries away from children.

This is a quick guide for experienced installers only. Refer to <http://dealers.qolsys.com> (login required)


STEP 2 REMOVE BATTERY TAB




STEP 3 APPLY ADHESIVE



STEP 4 LINE UP SENSOR & MAGNET



STEP 5 SECURE SENSOR & MAGNET




Apply provided adhesive strips to the back of sensor and magnet.

Magnet gap should not exceed 1/2"

STEP 6 LEARN INTO PANEL



Place your panel in "auto learn" mode



Open and close the case to "tamper" the device

ADD

Customize name and settings as desired and touch "ADD"



ASK **JENNI**
Qolsys



Document#: IQDW-SQG-06-17
Revision#: 6/2/17
Issue Date: JUN 2017
Qolsys Product #: QS1133-840

Qolsys Inc. proprietary.
Reproduction without permission is not permitted.
FCC ID: 2ABBZ-RF-MDWS-HP-S
IC: 11817A-RFMDWSHPS

GOT QUESTIONS?
CONTACT TECH SUPPORT
TechSupport@Qolsys.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec Industrie Canada exempts de licence standard RSS (s). Son fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne doit pas provoquer d'interférences et (2) cet appareil doit accepter toute interférence, y compris celles pouvant causer un mauvais fonctionnement de l'appareil.