




AV-04AFD

EMERGENCY INTERCOM

Description

AV-04AFD can be mounted in special positions that have been designed with high standards for fire safety in mind.



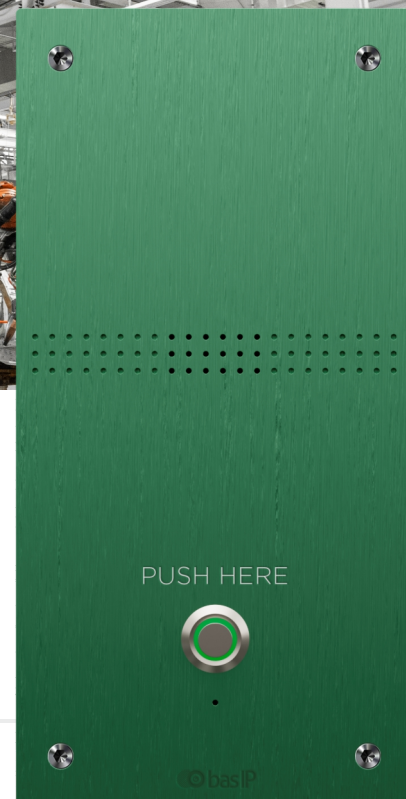





It helps to organize feedback with the dispatcher to confirm a fire or emergency situation.



Specifications

Panel type	Individual
Protection class	IP65
IK-Code	IK10
Working temperature	-40 — +65 °C
Power consumption	6,5 W, in standby — 3,6 W
Power supply	PoE, +12 V DC
Body	Aluminum
Colors	Green / Red / Silver
Dimensions for installation	85 × 180 × 45 mm
Size of the pane	95 × 190 × 27 mm
Installation	Flush mount

Main features

 Mechanical button	 Software Link support
 Flush mounting	 Protection class IP65
 PoE and +12V DC	 IK-Code IK10
 Open API	 Aluminum case

Functional capabilities

Interface	Multi-language graphical and WEB interface	Connection of the additional SH-12 module and its support	Wiegand input: from 6 to 128 bits inclusive
Shortcut buttons	1 piezoelectric call button		Wiegand output for card, key fob, UKEY, QR, Face,
Number of call melodies	4 polyphonic melodies		Digital code, and all other types of identifiers: from 26 to 128 bits inclusive.
Authentication	WEB – interface		
Optional	SIP P2P Open API		

Color variations



Appearance and mechanical mounting

