


# AV-06M

## ENTRANCE PANEL

### Description

The BAS-IP AV-06M is a sleek and compact single-button entrance panel designed for seamless video communication at villa entrances or front doors. Despite its slim profile, the panel features a Mifare card reader, high-quality camera, status LED indication, and robust access management capabilities.


It supports various identification methods, including access cards, QR codes, vehicle license plates, and remote control via an indoor monitor. With the BAS-IP SH-12 accessory, the AV-06M can also connect to external access keypads or advanced readers, enhancing its versatility and functionality.

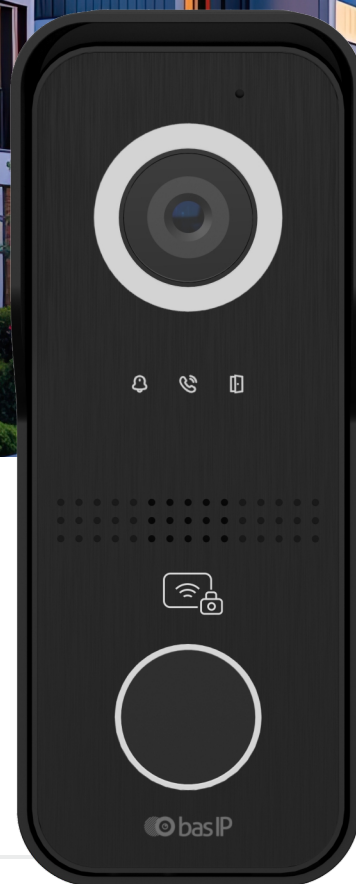

### Specifications

Panel type	Individual
Camera	1/2.8"
Resolution	2 Mpx
Camera angle	110° (horizontal)
Output video	FullHD (1920 × 1080), H.264 Main Profile
Wide Dynamic Range (WDR)	Yes
Night backlight	12 LEDs
Light sensitivity	0,01 LuX
Protection class	IP65
IK-Code	IK06
Working temperature	-40 — +65 °C
Power consumption	5.5 W, in standby — 2.1 W
Supported Cards	Mifare®: Ultralight, Ultralight Ev1, Light ID, Standard, Classic (1K/4K), Classic EV1 (1K/4K), DESFire Light (read-only UID, 4 bytes), DESFire Ev1 (read-only UID, 4 bytes), NFC (ISO 14443).
Wi-Fi	2.4GHz (IEEE 802.11 n)
Power supply	+12V DC, IEEE PoE 802.3af
Memory card support	MicroSD * up to 32GB
Body	Plastic
Colors	Black
Size of the panel	52 x 137 x 28 mm
Installation	Surface Mounting with or without Sun & Rain Cover (included)
Additional accessories	Rotating Bracket 35-degree (sold separately)

### Main features

 Camera: 2.0 MP	 Output video 1080p
 IEEE PoE 802.3af and +12V DC	 Wi-Fi: 2.4 GHz (802.11n)
 Software Link support	 Mifare® Card Reader
 Panel Status LED indication	 Plastic Sun & Rain Cover and Rotating Bracket

The specifications and appearance of the device may differ from those stated or may change without prior notice.

\*reserved; firmware update only.

## Functional capabilities

Interface

Multi-language graphical and WEB interface

Lock opening

By means of a monitor  
By QR code  
By License plate  
By Access card  
By Exit Button  
The BAS-IP Intercom app  
The BAS-IP Link app  
From API

Identifiers in the panel memory  
(QR codes, cards, key fobs)

20 000

Integration with ACS

Wiegand

Built-in Wiegand output for card,  
key fob

26, 34, 58 bits

Connection of the additional  
SH-12 module and its support

Wiegand input: 26, 34, 58 bits  
Wiegand output for card, key fob, and all other types  
of identifiers: 26, 34 и 58 bits inclusive.

Shortcut buttons

1 Mechanical call button

Sound Notifications

Customizable sounds for ringback, door unlock, incoming calls, call in progress,  
and communication in progress

Authentication

Separate passwords for the web interface

Additional Features


Built-in relay, tamper sensor, SIP P2P, Link software support, open API,  
and event-triggered photo uploads to the server

## Color variations



BLACK

## Surface mounting

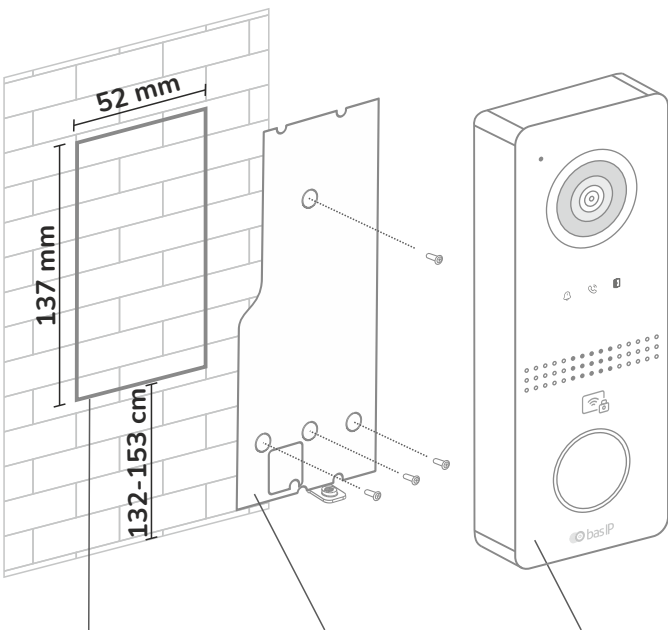


Mounting area

Surface mounting  
bracket

Outdoor Panel

## Surface mounting with Sun & Rain Cover

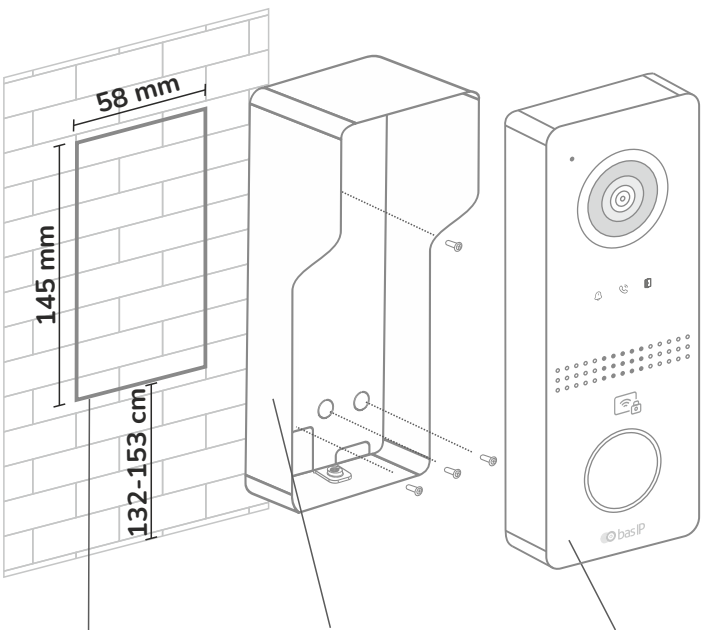


Mounting area


Surface mounting bracket  
with Sun & Rain Cover

Outdoor  
Panel

Surface mounting with rotating bracket

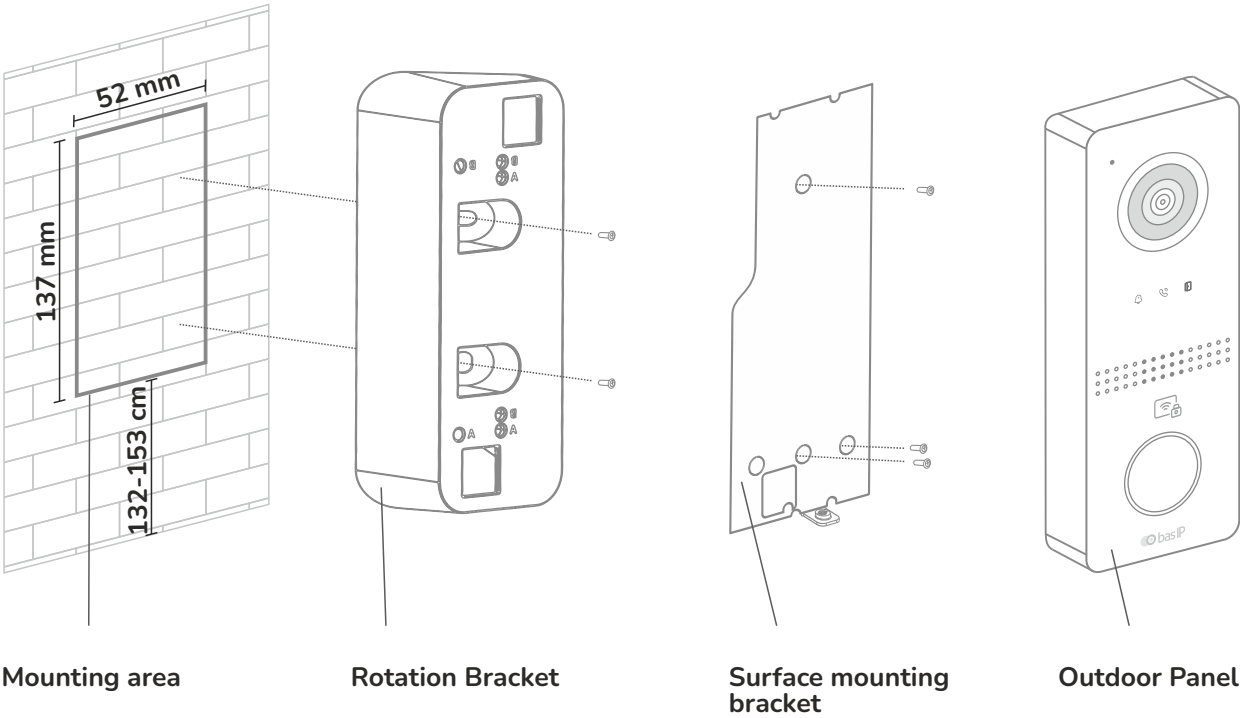

Surface mounting with Sun & Rain Cover and rotating bracket

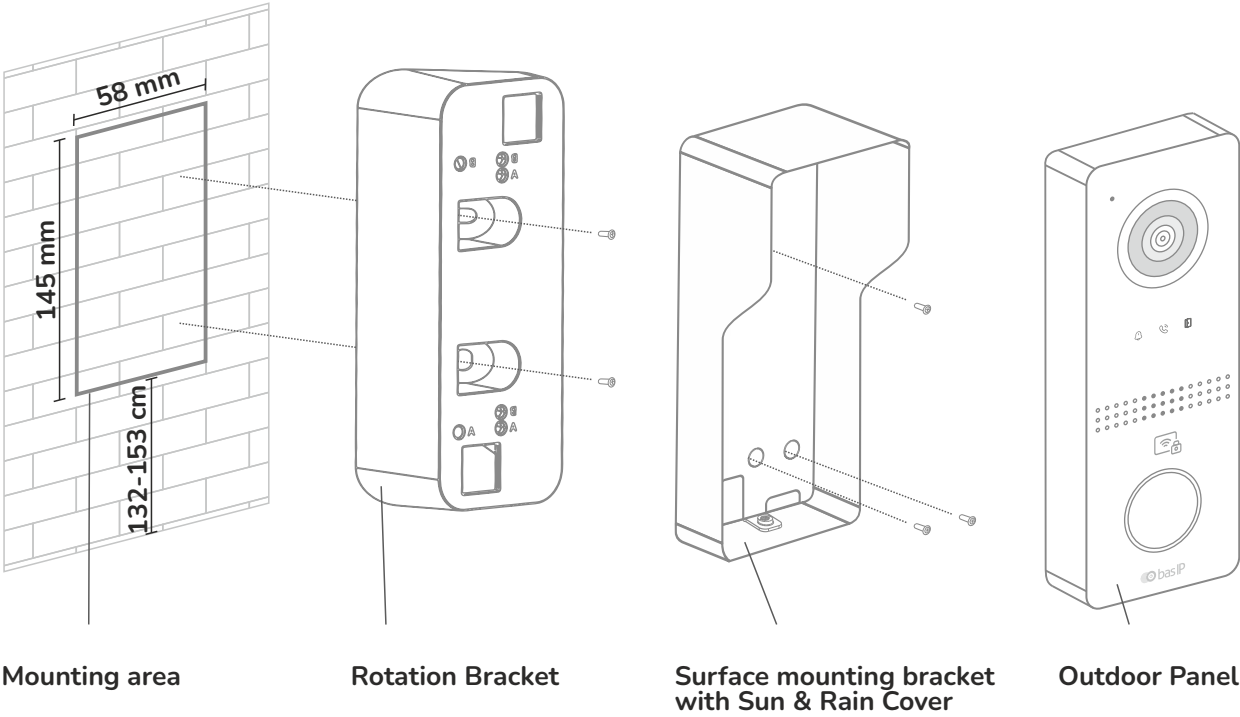

Rotating Bracket 35-degree is not included in the box and must be purchased separately.