


REV	DATE	NOTES
A	10/17/06	Initial Release
B	05/10/09	Models updated
C	11/15/13	Specifications updated per ANSI/UL 62275 update

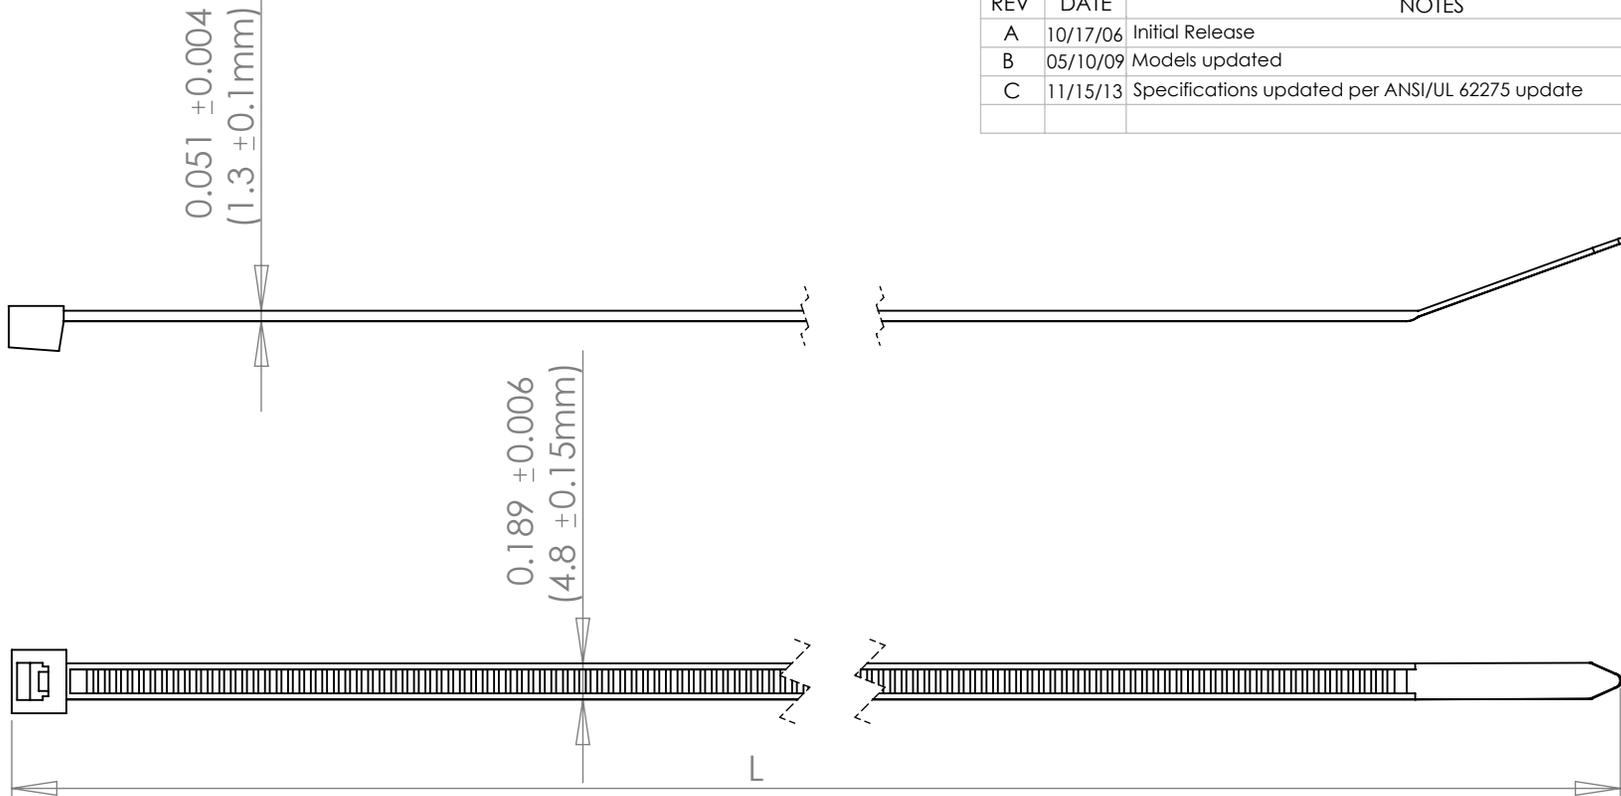

Model Number	Approx Length "L"	Min Bundle Diameter	Max Bundle Diameter
CT7-50	7.5" (190mm)	0.276" (7mm)	1.811" (46mm)
CT8-50	8" (200mm)		1.969" (50mm)
CT11-50	11" (280mm)		2.756" (70mm)
CT14-50	14.5" (370mm)		4.016" (102mm)
CT17-50	17" (430mm)		4.331" (110mm)
CT24-50	24" (610mm)		7.087" (180mm)

*Suffix "-9" indicates Natural and "-0W" indicates UV Black
 *See Cambridge Catalog for Packaging Options and Designations

Notes:

1. Minimum Loop Tensile Strength: 50lb (220N)
2. Operating Temperature: -40°F to 185°F (-40°C to 85°C)
3. Minimum Installation Temperature: 5°F (-15°C)
4. UV Black ties are rated for outdoor use per ANSI/UL 62275
5. Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CAMBRIDGE RESOURCES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CAMBRIDGE RESOURCES IS PROHIBITED.

NAME		DATE		CAMBRIDGE	
DRAWN J Li		10/17/06			
UNLESS OTHERWISE SPECIFIED:				960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403	
DIMENSIONS ARE IN INCHES [] DENOTES MILLIMETER				TITLE: Cambridge Cable Ties 50lb Tensile Strength	
MATERIAL Nylon 6,6 94V-2		SIZE A	DWG. NO. CT-50 Rev C		REV C
DO NOT SCALE DRAWING				SHEET 1 OF 1	