

## DA-150EH-AM 3CU

### MULTI CHANNEL DIGITAL POWER AMPLIFIER




TOA's DA-150EH-AM Multichannel Power Amplifier features high power handling capabilities and commercial-grade durability. It has a rated output of 150 W x 8 channels (100/70V line output). It covers larger scale sound system applications where background/foreground music distributions and/or voice announcements are required in multi-zone. It can be mounted in an EIA standard equipment rack.

### Key features


## Specifications

Power Source	110-120 V AC, 50/60 Hz
Amplification System	Digital class D
Power Consumption	1000 W
Input	8 circuits, 0 dBV (1 V) (input level control in maximum position),
Rated Output	8 channels: 150 W x 8 (66.7 $\Omega$ (100 V)/33 $\Omega$ (70 V)
Output Power	110-120 V AC, 50/60 Hz
Frequency Response	50 - 20,000 Hz ( $\pm 3$ dB)
Total Harmonic Distortion	< 0.1%
Signal to Noise Ratio	> 95 dB (A-weighted)
Crosstalk	> 70 dB (A-weighted)
Protection Circuit	Short circuit, open circuit, thermal, excessive input, ultrasonic and RF
Indicators	Signal (green) x 8, Peak (red) x 8, Protect (red) x 8, Power (green) x 1
Cooling	Forced air cooling
Operating Temperature	0°C to +40°C (32 °F to 104 °F)
Finish	Panel: aluminum, black, alumiteCase: plated steel sheet
Dimensions	483 (W) x 44 (H) x 360 (D) mm (19" x 1.7" x 14.2")
Weight	7.3 kg (16.09 lbs)
Included Accessories	Power cord (2 m) ...1, Removable terminal plug (3 pins) ...8, Removable terminal plug (2 pins) ...8


## Dimensions

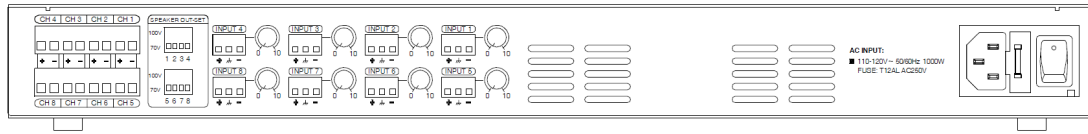

Rear View

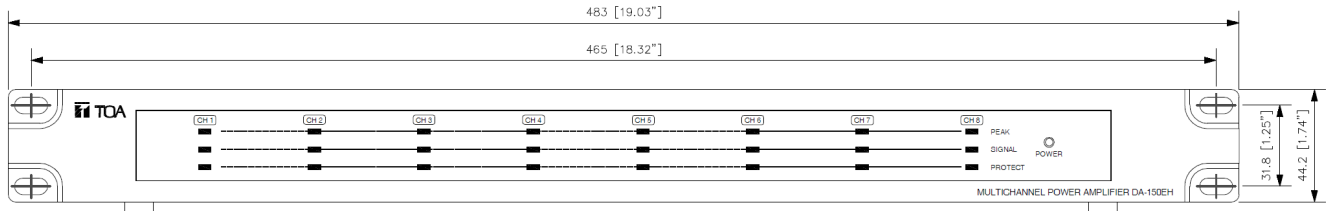

Front View

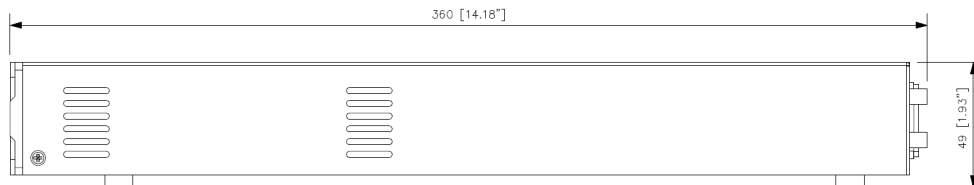

Side View

UNIT: mm