

DM-1300US

DYNAMIC MICROPHONE



The DM-1300US is a microphone suited to both vocal and speech applications.



Key features

Specifications


| | |
|----------------------|---|
| Type | Moving coil microphone |
| Directivity | Unidirectional |
| Impedance | 600 Ω , balanced |
| Sensitivity | -54 dB (1 kHz 0 dB=1 V/Pa) |
| Frequency Response | 70 - 15,000 Hz |
| Talk Switch | Short-off, slide switch |
| Compatible Connector | XLR-3-11C type connector |
| Finish | Body: Die-cast zinc, metallic gray, paint Head: Steel/zinc-plated steel wire, metallic gray, paint |
| Dimensions | $\varnothing 51 \times 170$ mm ($\varnothing 2.01'' \times 6.69''$) |
| Weight | 245 g (0.54 lb) |
| Included Accessories | Microphone holder (NS5/8)...1 Thred adapter (NS5/8 >> U5/16 or (W3/8)...1 |

Note: Microphone cables are not supplied with the microphone


Dimensions

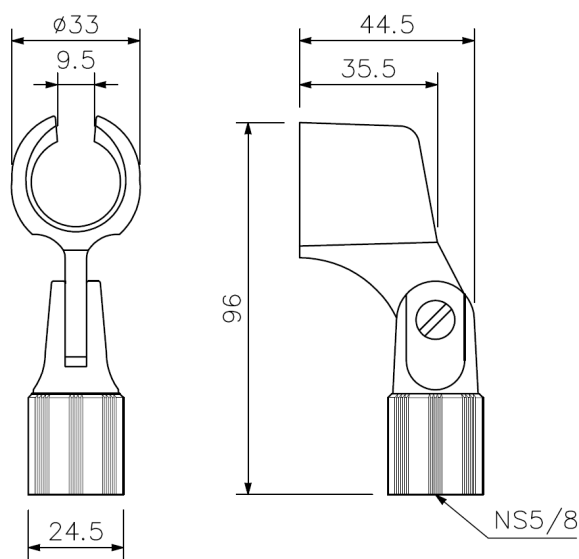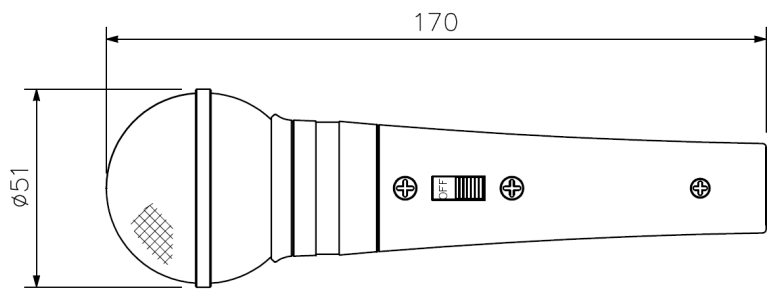

Microphone Holder

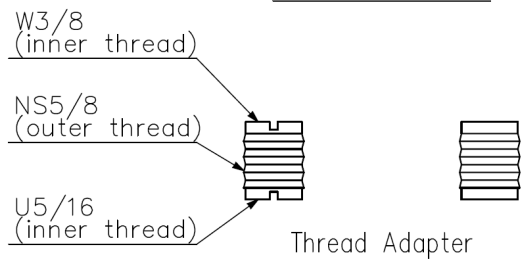

Thread Adapter



Circuit Diagram

UNIT: mm