

## EM-380-AM

### GOOSENECK MICROPHONE



The EM-380-AM is a uniquely shaped and high quality condenser microphone most suited for use in lecture halls and houses of worship. The EM-380-AM gives you the option of using battery or phantom power.


### Key features

\*UNDEFINED TEXT\*

## Specifications

Element	Condenser
Power Source	3V DC (2 x "AA" batteries) or Phantom Power (9 - 52V)
Polar Pattern	Cardioid
Impedance	750Ω, Balanced
Sensitivity	-41dB ± 3dB (1 kHz 0dB=1V/Pa)
Frequency Response	50 Hz - 16,000 Hz
Output Terminal	XLR-3-32 Equivalent
Operating Humidity	*UNDEFINED TEXT*
Finish	Stand Mic: ABS Resin, Black, PaintMic Shaft: Copper alloy, Black, Paint
Dimensions	110 (W) x 145 (D) x 532 (H) mm (4.3" x 5.7" x 20.9")
Weight	550g (exclude batteries)
Included Accessories	Windscreen x 1,XLR male to female Microphone cable (24.6 ft) x 1


## Dimensions

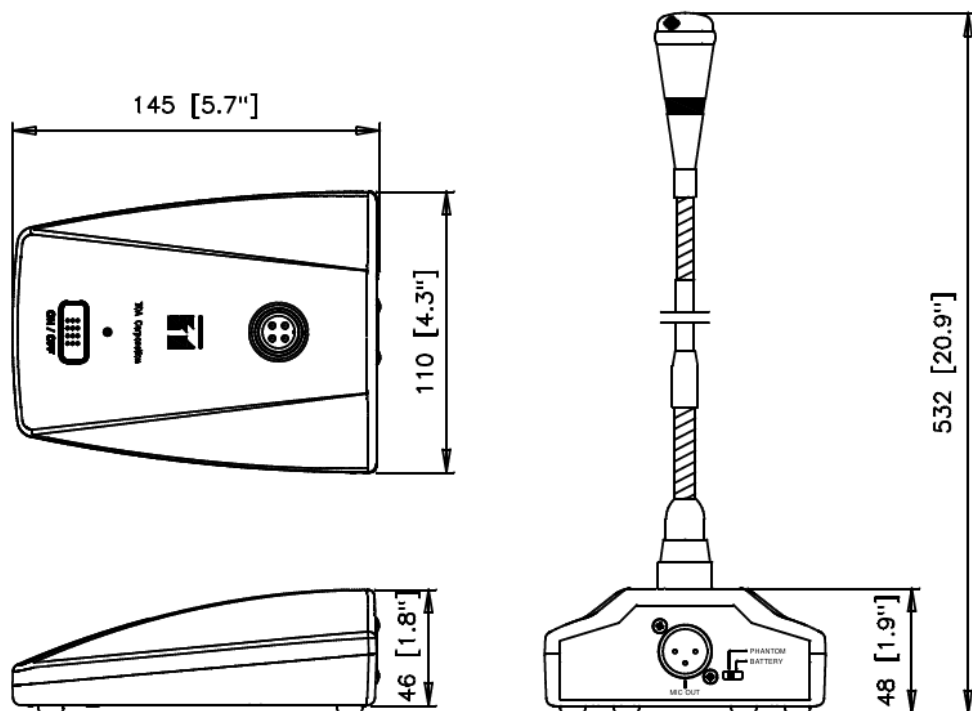

### Accessories.

UNIT : mm [in] SCALE : 1/3

XLR Male

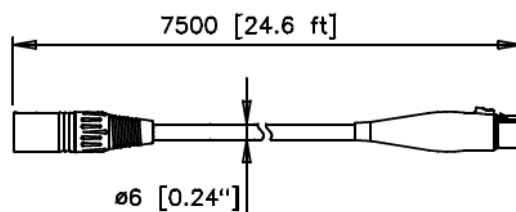

XLR Female



1 = GND  
2 = HOT  
3 = COLD