

D

D

C



C

B



B

A

A

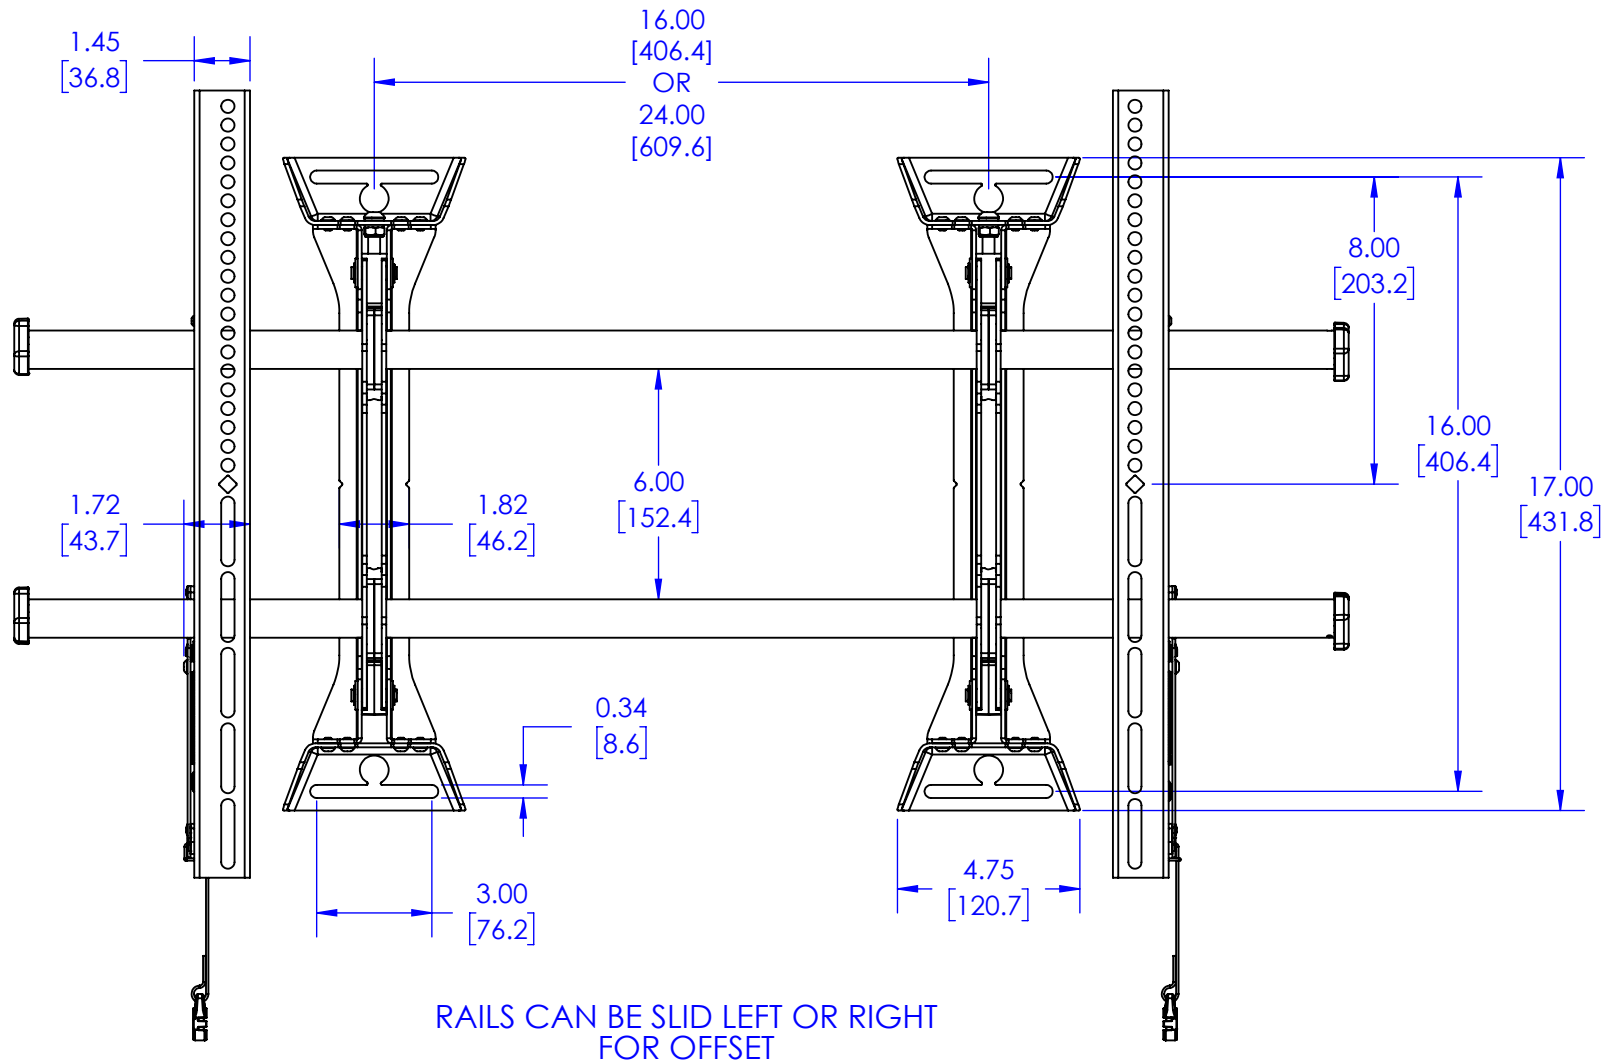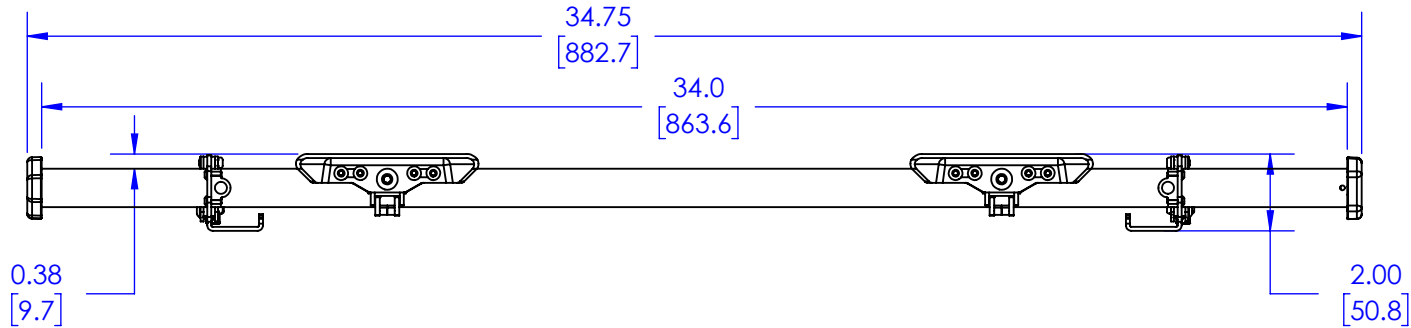


RAILS CAN BE SLID LEFT OR RIGHT FOR OFFSET

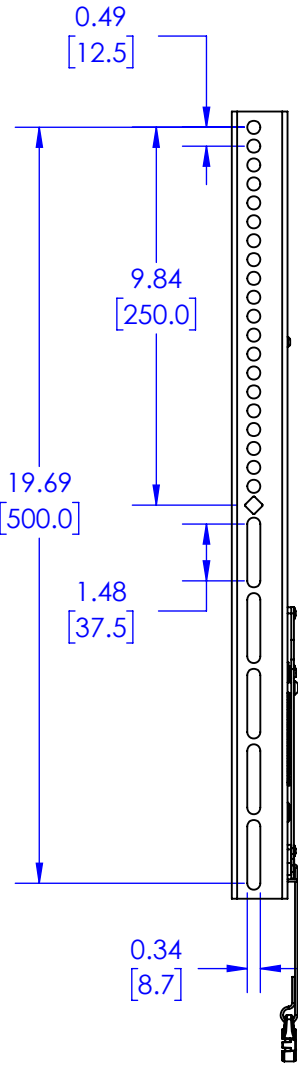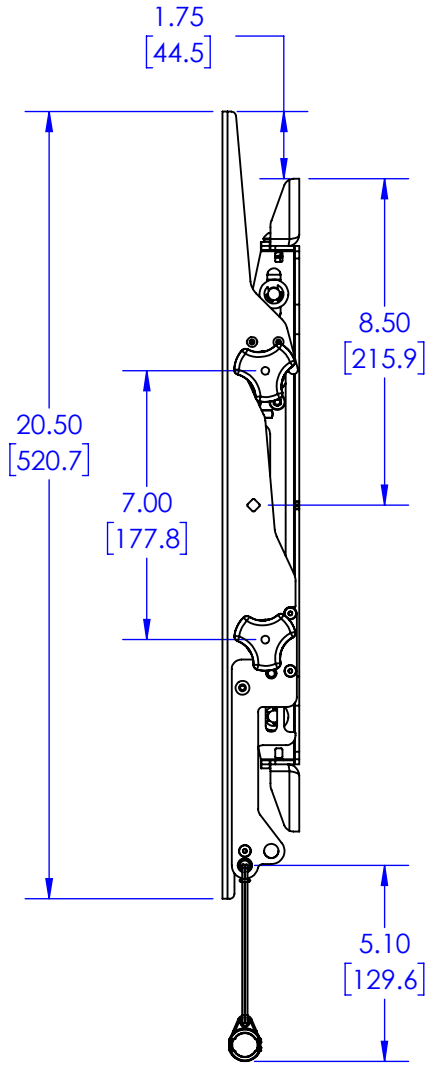

1. MAXIMUM MOUNTING PATTERN IS 31.7" [805mm] WITHOUT REVERSING UPRIGHTS (AS SHOWN)
2. MAXIMUM MOUNTING PATTERN IS 34.3" [871mm] WITH REVERSING UPRIGHTS
3. FOR RECESSED APPLICATIONS, MINIMUM VERTICAL LIFT FOR HOOK ENGAGEMENT IS .75" [19mm]

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF LEGRAND | AV. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF LEGRAND | AV.

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE.			 6436 CITY WEST PKWY EDEN PRAIRIE, MN, 55344 PHONE: 866-977-3901 FAX: 877-894-6918	
DRAWN BY	JAB	11/9/2015		
ENG APPROVAL			DESCRIPTION LSM1U CUSTOMER TECHNICAL DRAWING	
MFG APPROVAL				
QA APPROVAL			MODEL NO. LSM1U	
SHEET 1 OF 2		SCALE 1:5	SIZE B	DWG. NO. TECH-000780
				REV. 01

