

## ML-11T

### MICROPHONE LINE INPUT MODULE



The ML-11T is a Microphone/Line input module with a mute send/receive designed for use with 900 Series amplifiers. Phantom power is provided for condenser microphone use.

### Key features


- Connector: removable terminal block

## Specifications

\* 0 dB=1 V

|                      |                                                                |
|----------------------|----------------------------------------------------------------|
| Power Supply         | 24 V DC (supplied from the main frame)                         |
| Current Consumption  | 25 mA                                                          |
| Input Sensitivity    | -60/-10 dB* (changeable)                                       |
| Input Impedance      | 10 k $\Omega$ , balanced                                       |
| Included Accessories | Removable terminal block (3P) ...1, Module mounting screw ...2 |
| Frequency Response   | 20 Hz - 20 kHz $\pm$ 1.0 dB                                    |
| Distortion           | 0.05 % (1 kHz)                                                 |
| Phantom Power        | +22 V DC (active or disable selectable)                        |
| Connector            | Removable terminal block (3P)                                  |
| Dimensions           | 35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")            |
| Weight               | Max. 49 g (0.11 lb)                                            |

## Dimensions

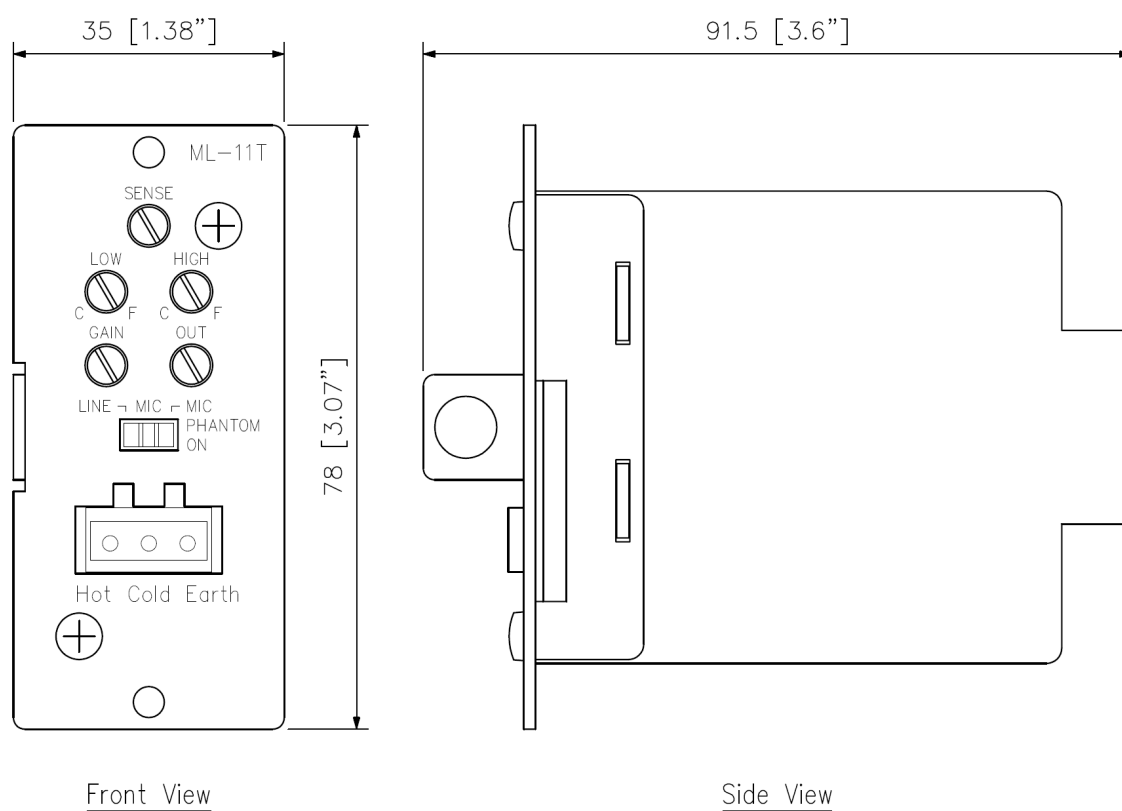

UNIT: mm