

## MTP-MTP 10G 50/125µm OM3 Type B MM Fiber Optic Jumper



### Package Includes:

- A. MTP-MTP 10G 50/125µm MM  
Fiber jumper, **1 Piece**

### Features and Benefits

- Made from OM3 fiber, compatible with any MTP cassettes & other MTP modules
- Type B polarity, 1 to 12 wiring
- Laser optimized fiber optic cable designed for 10 GHz applications
- Made with Corning® ClearCurve® glass, Bend-insensitive multimode fiber (BIMMF)
- Used with ICC fiber optic products
- Available in 5, 10, 15 & 20 meters
- Dust Cap included
- Plenum rated
- 100% factory tested
- Used with ICFC fiber cassette series

*\* ClearCurve® is a registered trademark of Corning®\**

*\*MTP® is a registered trademark of US Conec Ltd\**


Part No: ICFOJARGXX

Rev: B

Page 1 of 2

icc.com | cs@icc.com



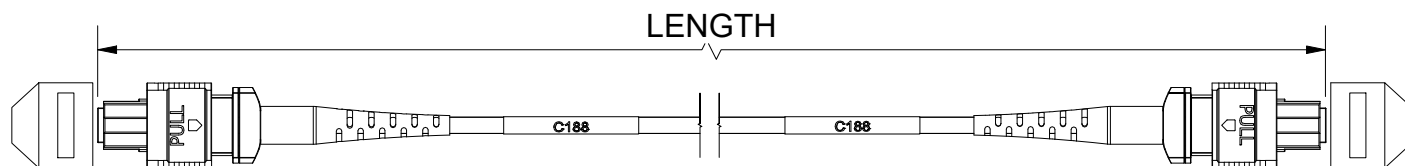

CONNECTOR PORT 1	CONNECTOR PORT 2	250 $\mu$ m FIBER COLOR
1	12	BLUE
2	11	ORANGE
3	10	GREEN
4	9	BROWN
5	8	GREY
6	7	WHOTE
7	6	RED
8	5	BLACK
9	4	YELLOW
10	3	VIOLET
11	2	PINK
12	1	AQUA

ITEM NUMBER	LENGTH
ICFOJARG05	5 METER $\pm$ 10 CM
ICFOJARG10	10 METER $\pm$ 10 CM
ICFOJARG15	15 METER $\pm$ 10 CM
ICFOJARG20	20 METER $\pm$ 10 CM

**NOTE: UNLESS OTHERWISE SPECIFIED**

**1. Cable:**

- A. Color: Aqua
- B. Fiber Counts: 2 Fiber Zipcord
- C. Fiber Type: Laser Optimized MM 50/125 $\mu$ m
- D. Attenuation: 2.3/0.6 dB/km @ 850/1300 nm
- E. Bandwidth: 2000 MHz.km EMB @ 850 nm
- F. Cable Data:
  - Cable diameter: .079 in (2.0mm)
  - Weight: 12 lbs./kft
  - Bend radius: 1.2" MIN
  - Loading: 135 lbs. MAX
  - Impact cycle: 1500

**2. MTP Connector:**

- A. Ferrule: ZirconiaS
- B. Insertion Loss: 0.5 dB typical, 0.75dB max
- C. Return Loss:  $\geq$  60dB
- D. Reflection: N/A

**3. Compliance:**

- A. ANSI/TIA-568-C.3

**4. Length XX: 05, 10, 15, 20 & meters**

Part No: ICFOJARGXX

Rev: B

Page 2 of 2

icc.com | cs@icc.com

