



FOR

SADO144

D/O No. A2144PB005

[illegible]



WONDERFUL (VIETNAM) WIRE & CABLE CO.,LTD.

SPECIFICATION

Style	75 °C, 300 V	Document No.: A2144PB005
Size	SADO144 14AWG X 4CORES	Established Date: 07/04/2020

Ref. Standard UL 13, UL444

Construction:

Conductor	Size	14AWG X 4CORES
	Conductor Material	AS Annealed Copper Stranded
	Conductor construction (mm)	105/0.157 ± 0.005 (*)
Insulation	Avg. Thickness (mm)	0.46
	Min. Thickness at any point (mm)	0.37
	Diameter (mm)	2.80 ± 0.20
	Material	Lead Free PVC
	Color	Core 1= Red ; Core 2= Black ; Core 3= White ; Core 4= Green
	Binder	Tissue tape
	Ripcord	1000 D
Jacket	Nominal Thickness (mm)	0.61
	Min. Thickness at any point (mm)	0.49
	Diameter (mm)	8.00 ± 0.50
	Material	Lead Free PVC
	Color	WHITE

(*) The diameter of some single wires maybe smaller than 0.152 mm but average diameter of total copper wires must be more than 0.152 mm.

Approved by:
Customer

Approved by:
Factory Director

QA Co-signed:

R&D Checked:

Done by: Lâm

TV Lâm




Modified Date:
11-08-2021

Page: 1/2



WONDERFUL (VIETNAM) WIRE & CABLE CO.,LTD.

SPECIFICATION

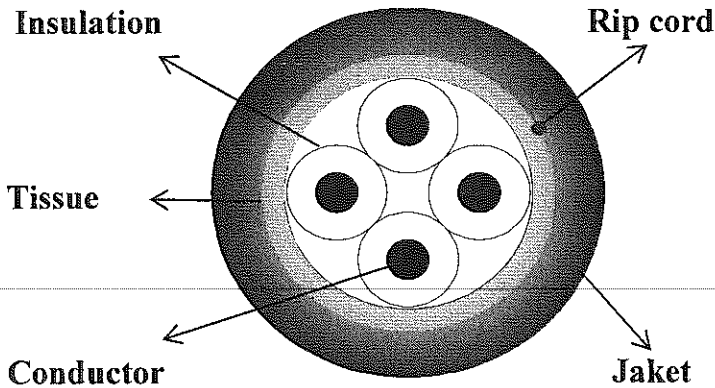Electrical & Physical Properties:			
Item		14AWG X 4CORES	
Rating Temp & Voltage		75 °C, 300 V	
Conductor Resistance (Ohm/Km/20 °C Max)		8.60	
Insulation Resistance		50 Mega Ohm.Km at 20 ⁰ C (Minimum)	
Dielectric Strength (Under water)		AC	500 V/1 Minute (No Broken)
Spark Test		1.80 KV for 0.15 seconds (No Broken)	
Insulation	Unaged	Tensile Strength	13.8 Mpa (1.41 Kg/mm ²) (Minimum)
		Elongation	100 % (Minimum)
	Aged	Tensile Strength	Unaged Min. 70% (100±1°C x 240 Hrs)
		Elongation	Unaged Min. 65% (100±1°C x 240 Hrs)
Jacket	Unaged	Tensile Strength	13.8 Mpa (1.41 Kg/mm ²) (Minimum)
		Elongation	100 % (Minimum)
	Aged	Tensile Strength	Unaged Min. 70% (100±1°C x 240 Hrs)
		Elongation	Unaged Min. 65% (100±1°C x 240 Hrs)
Cold Bend Test		-20±1 ⁰ C x 4 Hrs (No Crack)	
Marking:			
ULTRA FLEXIBLE ELITE AUDIO CABLE C(UL) CMR FT4 E122980-VN 14AWG/4C OFC (OXYGEN FREE COPPER) (UL) CL3R 75°C ROHS COMPLIANT --- DIRECT BURIAL UV PROTECTED XXX/XXX FT MMDDYY			
Note: Marking color: Black			
Construction Drawing:			
Scale : None			


Approved by:
Customer

Approved by:
Factory Director

QA Co-signed:

R&D Checked:

Done by: LÂM

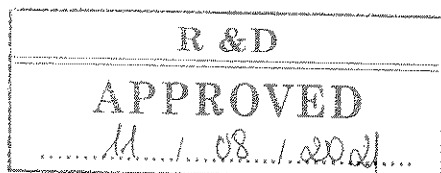

Edit: 1.1

Modified Date:
11-08-2021

Page : 2/2