

SD-70

RECESSED CONTACTS

.75"(19.05mm) Steel Door Recessed Type



Contact Size: .75"×.84"(19.05mm×21.3mm)

Standard Magnet Size: .75"×.84"(19.05mm×21.3mm)

Standard Gap: 1.1"(28mm)

Colors: White, Brown

12"(305mm) 22 AWG Leads Standard

Longer leads available.

Specifications



Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
SD-70	1.1"(28)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
SD-71B	1.1"(28)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
SD-70 WG	1.26"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
SD-72C	1.1"(28)	SPDT	SPDT	3	100	AC30/DC30	0.2
SD-74C	.75"(19)	DPDT	DPDT	3	100	AC30/DC30	0.2

OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

SD-70/SD-71B

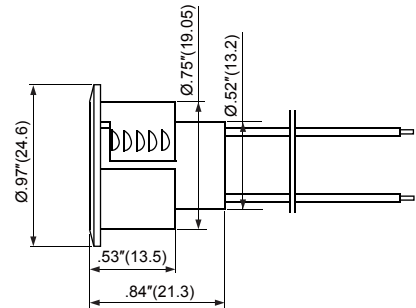

The Best Guarantee Since 1984 : \$50-1
TANE ALARM PRODUCTS



Outline Dimensions

Unit: inch(mm)



SD-70 WG





Bare Rare Earth
(BT 3/8"×3/4")

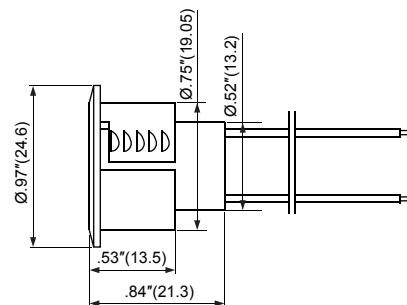

SD-72C

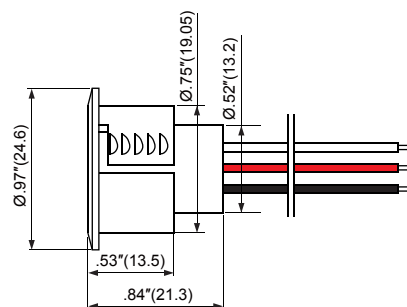


SD-74C

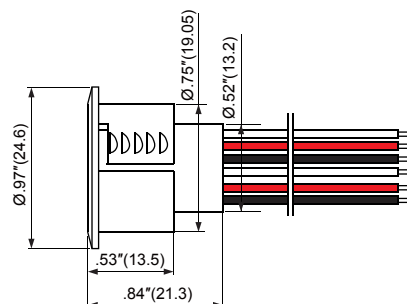


Wiring Diagram

SD-72C

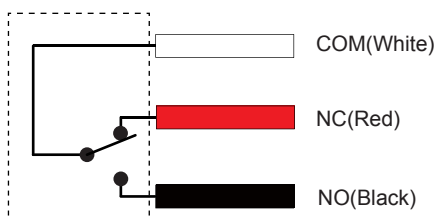

SD-74C

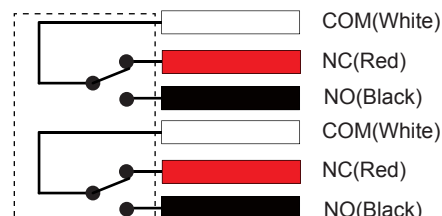

The Best Guarantee Since 1984 : \$50-1
TANE ALARM PRODUCTS