

DS-2CD6D54FWD-(I)Z(H)(S)**20 MP H.265+ PanoVu EXIR Flexible Network Camera Series**

- 1/2.7" Progressive Scan CMOS
- 2560 x 1920 @ 24 fps
- 4 x 2560 x 1920 @ 24 fps (20 MP Total)
- FOV: Horizontal 30° to 101°, Vertical 22.4° to 73°, Diagonal: 37° to 137°
- H.265+, H.265, H.264+, H.264
- True Day/Night
- 120 dB WDR
- 6 Behavior Analyses, 4 Exception Detections, and Face Detection
- 98 ft (30 m) IR Range
- IP67, IK10
- 4 x 3-Axis Individual Camera Gimbals

Hikvision's DS-2CD6D54FWD-(I)Z(H)(S) 20 MP H.265+ EXIR PanoVu Flexible Outdoor Network Camera features 1/2.7" progressive scan CMOS sensors and four lenses. Each lens supports 5 MP at 24 fps. Compression up to H.265+ saves bandwidth and storage space. EXIR technology (-I) extends the IR range to 98 feet (30 meters).

Available Models

DS-2CD6D54FWD-Z

DS-2CD6D54FWD-IZHS

*-Z: Zoom lens**-I: IR**-H: Heater (activates at -40°C)**-S: 1 audio input (line in), 1 audio output, 2 alarm inputs, 2 alarm outputs, 1 RS-485 interface*


Specifications

DS-2CD6D54FWD-x		
Camera		
Image Sensor	4 x 5 MP 1/2.7" progressive scan CMOS	
Minimum Illumination	Color: 0.006 lux @ (f/1.2, AGC on), 0.010 lux @ (f/1.6, AGC on) B/W: 0.002 lux @ (f/1.2, AGC on); 0.003 lux @ (f/1.6, AGC on) 0 lux with IR on	
Shutter Speed	1/25 s–1/100,000 s	
Auto-Iris	No	
Day/Night	IR cut filter	
Digital Noise Reduction	3D DNR	
WDR	120 dB	
3-Axis Adjustment	Four flexible lenses in one track, slide range: -180° to 180°, tilt: 0° to 135°, rotate: 0° to 355°	
Lens		
Focal Length	2.8 mm to 12 mm	
Aperture	f/1.6	
FOV	Horizontal field of view: 30° to 101° Vertical field of view: 22.4° to 73° Diagonal field of view: 37° to 137°	
Lens Mount	Ø14	
IR		
IR Range	33 ft to 98 ft (10 m to 30 m)	
Wavelength	850 nm	
Compression Standard		
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub stream: H.265/H.264/MJPEG Third stream: H.265/H.264	
H.264 Type	Baseline profile/main profile/high profile	
H.264+	Yes	
H.265 Type	Main profile	
H.265+	Yes	
Video Bit Rate	32 Kbps to 16 Mbps	
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM (-S)	
Audio Bit Rate	64 Kbps (G.711)/16 Kbps (G.722.1)/16 Kbps (G.726)/32–192 Kbps (MP2L2) (-S)	
Smart Features		
Event	Any single channel, or channels	Line crossing detection, intrusion detection, region entrance detection, region exiting detection, unattended baggage detection, object removal detection
Exception Detection	1+3, or 2+4	Audio exception detection (-S), scene change detection, defocus detection
Face Detection		Yes
Region of Interest	Supports 4 fixed regions for each stream	
Image		
Maximum Resolution	2560 x 1920	
Original Image	Main Stream	24 fps (2560 × 1920, 2048 × 1536, 1920 x 1080,1280 x 720)
	Sub-Stream	24 fps (704 × 480, 640 × 480)
	Third Stream	8 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480)
Full FOV Resolution	Total	10240 x 1920
	Per Sensor	2560 x 1920
Image Enhancement	BLC, 3D DNR, EIS	
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness, and white balance are adjustable by client software or Web browser	
SVC	Supported	
Day/Night Switch	Day/night/auto/schedule/triggered by alarm in (-S)	
Picture Overlay	Logo picture can be overlaid on video with 128 × 128 24-bit bmp format	
Network		
Network Storage	Supports microSD/SDHC/SDXC card (128 GB), local storage and NAS (NFS, SMB/CIFS), ANR	
Alarm Trigger	Motion detection, video tampering alarm, network disconnected, IP address conflict, illegal login, HDD full, HDD error	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1x, QoS, IPv6, UDP	
General Functions	One-key reset, anti-flicker, mirror, heartbeat, password protection, privacy mask, watermark, IP address filter	
API	ONVIF (PROFILE S, PROFILE G), ISAPI	
Simultaneous Live Views	Up to 20 channels	
User/Host	Up to 32 users	
	3 levels: Administrator, Operator, and User	
Client	iVMS-4200	
Web Browser	IE8+. Chrome 31–44. Firefox 30.0–51	

Specifications (continued)

Interface	
Audio (-S)	1-ch 3.5 mm input (line in), 1-ch 3.5 mm output, dual-track, stereo
Communication Interface	1 RJ-45 10M/100M/1000M Ethernet port 1 RS-485 interface (-S)
Alarm (-S)	2 inputs, 2 outputs (up to 24 VDC, 1A, or 110 VAC, 500 mA)
On-Board Storage	Built-in microSD/SDHC/SDXC slot, up to 128 GB
Reset Button	Yes
Audio (-S)	
Environment Noise Filtering	Supported
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
General	
NVR Compatibility	Fully compatible with Hikvision I Series NVRs, compatible with E Series up to H.264+
Operating Conditions	-22° to 140° F (-30° to 60° C). -H: -40° to 140° F (-40° to 60° C) Humidity 95% or less (non-condensing)
Power	-Z 12 VDC $\pm$ 25%, 12 W
	PoE (802.3af) 13 W
	-IZHS 12 VDC $\pm$ 25%, 28 W
Protection Levels	Hi-PoE 34 W (PoE injector included)
Protection Levels	IP67, IK10
Material	Aluminum alloy, engineering plastics
Gimbals	4 x 3-axis with 360° pan, 90° tilt, and 360° Z-axis
Dimensions	Camera: $\varnothing$ 290 mm $\times$ 145.5 mm ($\varnothing$ 11.42" $\times$ 5.73")
	Package: 453 mm $\times$ 393 mm $\times$ 385 mm (17.8" $\times$ 15.47" $\times$ 15.16")
Weight	Camera: Approximately 4.7 kg (10.3 lb)
	With package: Approximately 7.7 kg (16.8 lb)

Dimensions

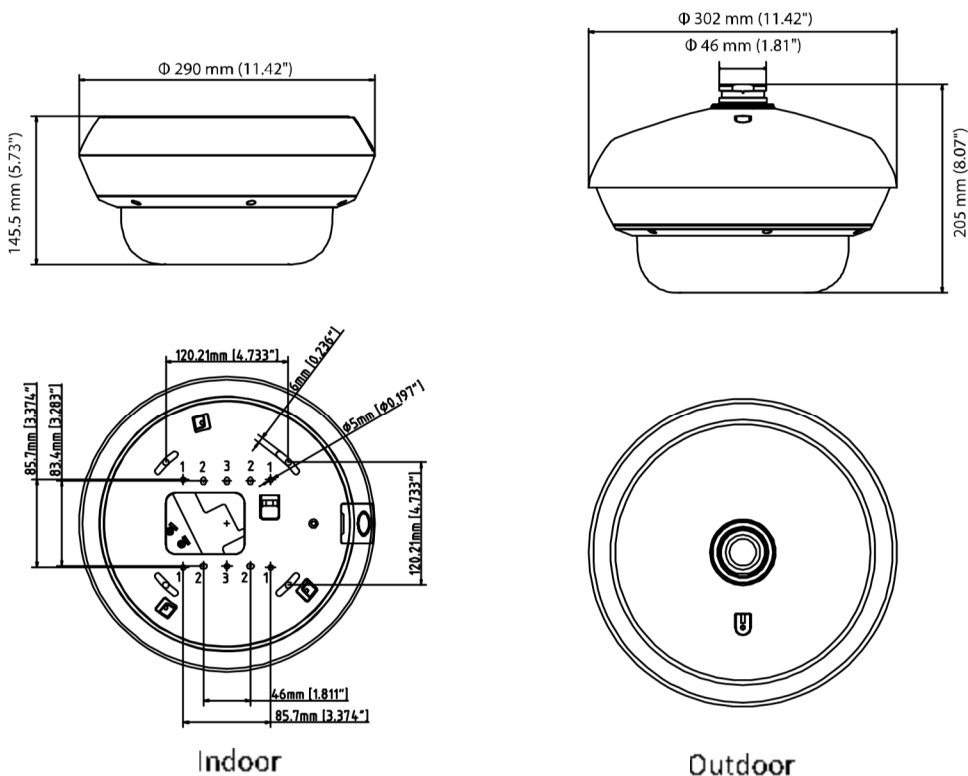

Accessories

Not Included					
					
WMP-L Wall Mount	WMP-PV Wall Mount	JBPW-L Wall Mount	PMP Vertical Pole Mount	CMP Corner Mount	CPM-S Pendant Mount Small

			
RPM Roof Parapet Mount	PMP-JB Pole Mount	CPM-L Ceiling Pendant Mount Large	CPMPE Ceiling Pendant Mount Extension

Included

Pendant Cap

Box Contents (Subject to Change without Notice)

BNC Connector
 Machine Screws
 Microfiber Cloth
 Mounting Posts
 Pendant
 Plastic 3/4" Conduit Adapter
 Power Filter
 Power Pigtail with Screw Terminals
 Quick Start Guide x 2
 Screws
 Steel Washer
 Watertight Tape
 Wrench
 Watertight Cable Connector