

B-21S

BRIDGING TRANS MODULE



The B-21S is a line module to be used in conjunction with the 900 series. It has a balanced input and can be remotely controlled.


Key features

- For balanced or unbalanced, line level equipment such as tuners, tape decks and CD players
- Transformer isolation (10k Ω)
- Allows remote control of input signal using an external 10k ohm linear-taper potentiometer
- Connector: screw terminal

Specifications

Power Supply	24 VDC
Current Consumption	Less than 27 mA
Input Sensitivity (Rated Output 1V)	0.9 - 10 V (adjustable)
Noise Output	Less than 50 μ V
Frequency Response	20 Hz - 20 kHz
Distortion	Less than 0.05 %
Remote Volume Control	More than 55 dB
Input Connector	5P screw terminal
Output Connector	6P card edge-connector
Dimensions	35 (W) x 78 (H) x 88 (D) mm
Weight	90 g

Dimensions

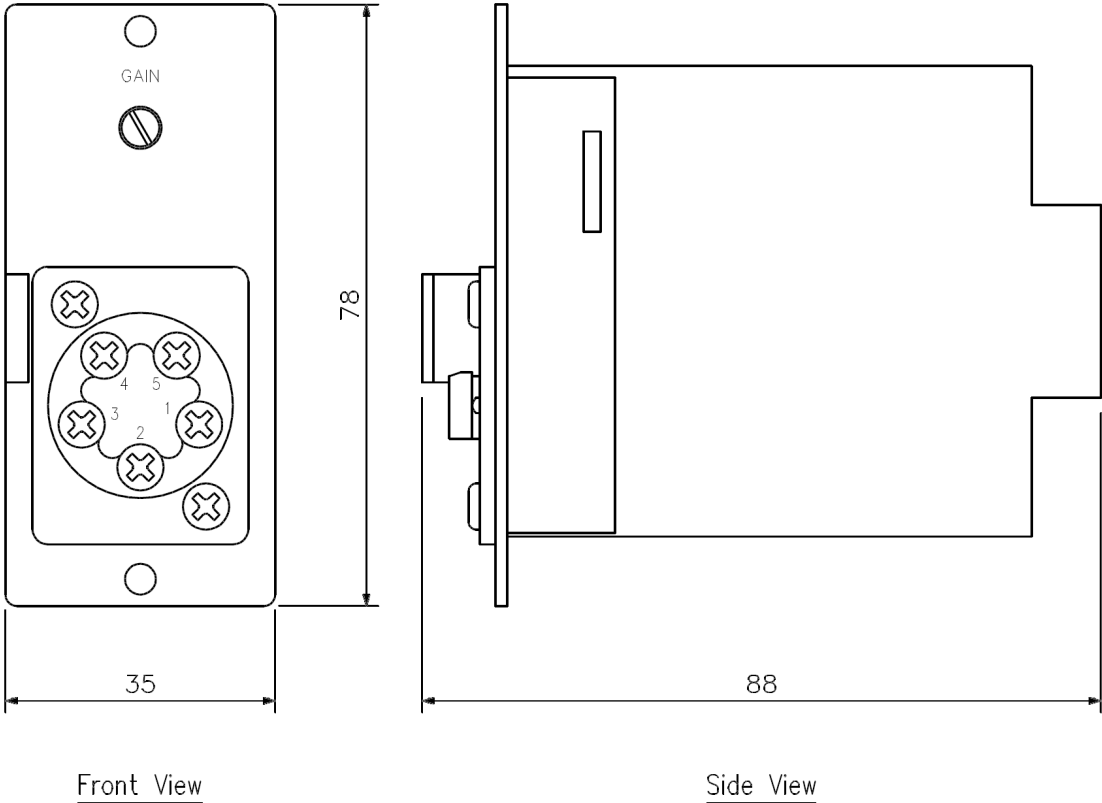

CONNECTION	1: Earth 2: Common 3: Hot 4: Potentiometer 10 kΩ 5: Potentiometer 10 kΩ
------------	---

UNIT:mm