

### L-01F

#### LINEMATCHING TRANS MODULE



The L-01F is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has a transformer balanced line matching input with female XLR type connector.

# Key features

- $\bullet$  For applications requiring  $600\Omega$  line-matching
- Transformer isolation (600Ω)
- Connector: female XLR


1


# **Specifications**

\* 0 dB=1 V

Input Sensitivity	-18 dB* (Rated output: -20 dB*)
Input Impedance	$600~\Omega$ , balanced transformer-isolated
Frequency Response	20 Hz - 20 kHz ±1.5 dB
Connector	Female XLR connector (XLR-3-31 equivalent)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 110 g (0.24 lb)

## **Dimensions**

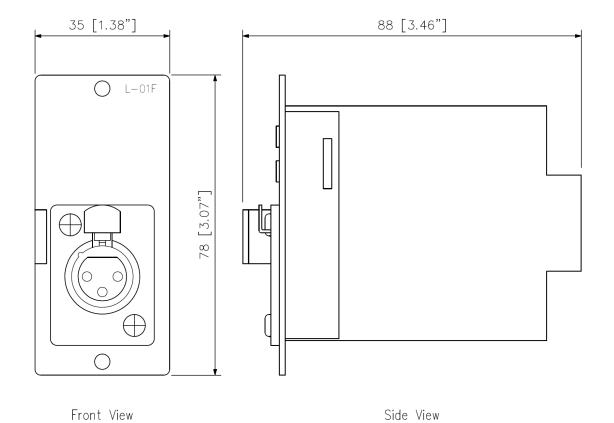



Connection Diagram

UNIT: mm

