# *Bluetooth*® Access Controller

**SK-B241-PQ**  *Mullion Keypad with Proximity Reader*

*Streamlined, fully app-based setup using integrated Bluetooth® wireless technology. No codes to remember, intuitive app design for easy, visual programming. Provides convenience and security to the user and administrator. All data is secured on the device without the risks inherent with an internet connection.*

## Features

- **No Codes to Remember** – Intuitive, visual app-based programming and management, 1,000 users, device options, etc.
- **More Than Access** – Can control doors, gates, lighting, machinery, etc.
- **No Internet Exposure** – All data secured locally on device
- **Multiple User Types** – Permanent, scheduled, temporary, # of times
- **Output Modes** – Timed relock, continually unlocked or locked, toggle
- **User Customization** – Individually customizable output mode and time
- **Hold Open** – Hold door open with code or app (customizable)
- **Secure, Integrated Bluetooth** – Passcode protected, AES 128 encryption
- **Unlimited Devices** – Access/manage unlimited devices with one app
- **Easy Backup/Restore** – For off-device storage / restoration / replication
- **Wrong-Code Lockout and Tamper Alarm Output** – Customizable
- **Multilingual App Interface** – Currently supports English, Spanish, Portuguese, French, German, Russian, Vietnamese, and Chinese (Traditional or Simplified)

| App-Based Setup | No Internet Exposure | 1,000 Users | Audit Trail |
|---|---|---|---|

### SL Access™ App

Available on the App Store

Get it on Google play

## App-Based Management and Control

**On-Device Security**
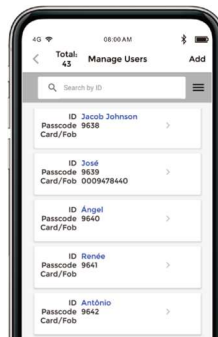AES 128 Encryption Settings, passcodes kept on device, set by the Administrator

**Administrator Settings**
Set all device parameters, manage users, view audit trail, backup/restore

**User Management**
Add, view, import/export, customize individual settings, scheduling, output settings

**Audit Trail**
View most recent 1,000 events, searchable by user and type, and download for archive

**Unlock with App**
Users can unlock the door with the app, as well as with the keypad or prox



**SECO-LARM® U.S.A., Inc.**
16842 Millikan Avenue, Irvine, CA 92606
**Phone:** (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326
**Website:** www.seco-larm.com **Email:** sales@seco-larm.com

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PI_SK-B241-PQ_250326.docx

# Specifications

| Access modes | App / keypad / proximity card |
|---|---|
| Users | 1,000 users / 1 administrator |
| Operating voltage | 9~25 VDC |
| **Current draw** | **Standby** | 60mA@12VDC, 30mA@24VDC |
| | **Active (max.)** | 115mA@12VDC, 55mA@24VDC |
| **Outputs** | **Form C** | 2.0A@30VDC |
| | **Tamper alarm** | 100mA@30VDC (solid state N.C.) |
| Output modes | Timed relock (1~1,800s), continually locked, continually unlocked, toggle |
| **Inputs** | **Egress** | N.O. Ground |
| | **Door sensor** | N.C. Ground |
| Keypad | Backlit |

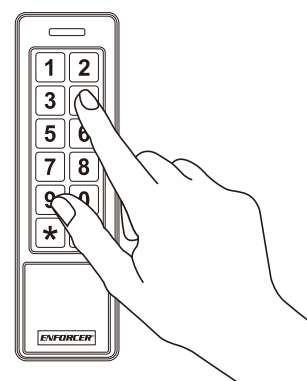| Tamper Sensor | Vibration detector |
|---|---|
| Electrical protection | Short circuit, electrostatic discharge, reverse polarity, relay contact protection |
| Bluetooth version | Bluetooth Low Energy (BLE) 4.2 |
| Proximity frequency | EM 125kHz |
| IP Rating | IP65 Weatherproof |
| Operating humidity | 0~95% non-condensing |
| Operating temperature | -4°~122° F (-20°~50° C) |
| Material | Zinc alloy with chrome plating |
| Dimensions | $1^3/_4$"x6"x$^7/_8$" (45x152x23 mm) |
| Weight | 15.8-oz (447g) |

# Three Ways to Unlock or Trigger a Device
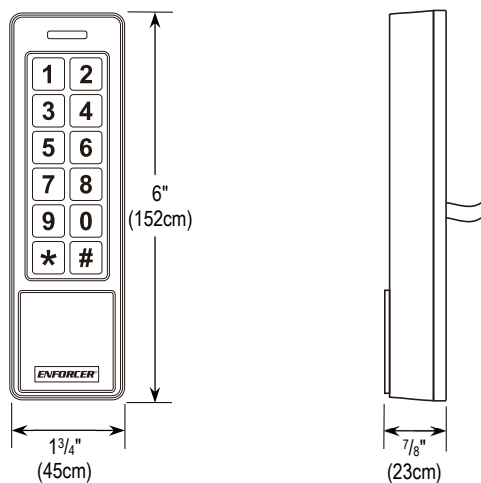


Unlock with the *SL Access* app
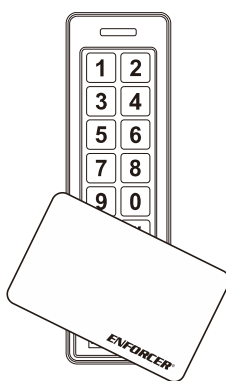
Unlock with a proximity card

Unlock with the keypad

# Dimensions



6" (152cm)

$1^3/_4$" (45cm)

$^7/_8$" (23cm)

# Download the *SL Access*™ App



Available on the App Store
iOS 11.0 and higher

Get it on Google play
Android 5.0 and higher